
# 385/65R22.5 164K 20PR MTR60 KH 3PMSF TL




DYNAMO

M+S



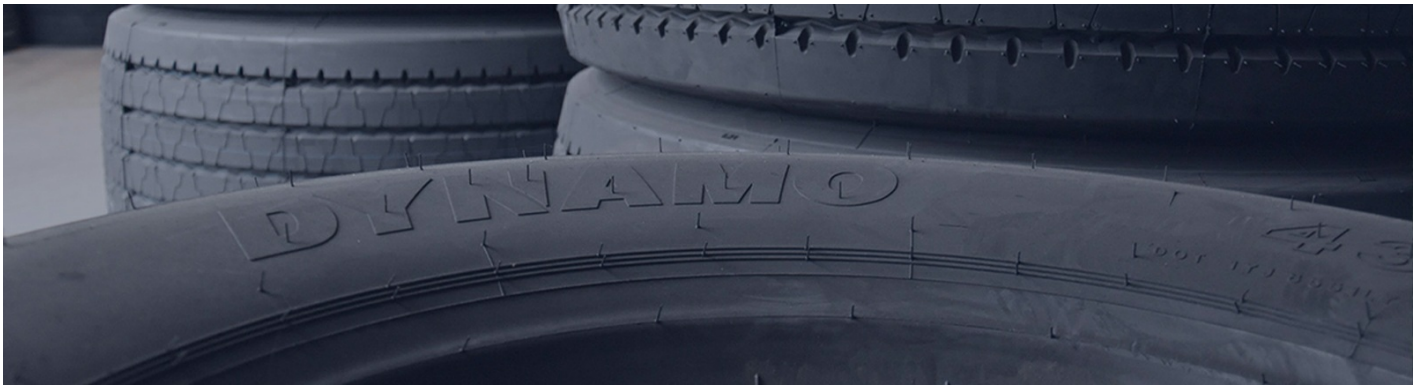



| Specifications | |
|---|---|
| Size: | 385/65R22.5 |
| Load / Speed: | 164K |
| Pattern: | MTR60 |
| Brand: | Dynamo |
| Category: | TBR |
| Width: | 385 |
| Series: | 65 |
| Structure: | R |
| Inch: | 22.5 |
| Ply Rating: | 24 |
| Load index: | 164 |
| Speed index: | K |
| TL/TT: | TL |
| Application: | Regional |
| Position: | |
| 40HC: | 175 |
| EAN Code: | 8848116079129 |
| Factory code: | 312005399 |
| **Technical details** | |
| Recommended Rim: | 11.75 |
| Inflation Pressure (bar): | 9 |
| Section Width (mm): | 389 |
| Outer Diameter (mm): | 1072 |
| Static Load Radius (mm): | 496 |
| Rolling Circumference (mm): | 3248 |
| Tread Depth (mm): | 15.5 |
| Weight (kg): | 79.186 |
| **Label values** | |
| Rolling resistance: | C |
| Wet / grip: | C |
| Sound: | B (72 dB) |
| Label code: | 1651465 |