

DYNAMO

PASSENGER & LIGHT TRUCK
TYRE CATALOGUE



DYNAMO

205 / 55 R16 94V DOT

1

2

3

4

5

6

7

1 Tread Section Width (mm)

The first number in this series refers to the tyre's section width, or the distance from sidewall edge to sidewall edge, measured in millimeters up and over the tyre's tread. In this example, the tyre is 205 mm wide. Generally speaking, the larger this number is the wider the tyre will be.

2 Aspect Ratio (ratio of sidewall height to width)

The aspect ratio refers to the height of the sidewall which is labeled as a percentage of the section width. In this example, the sidewall height is 55% of the 205 section width. This number can be indicative of a tyre's purpose. Lower numbers, like 55 or less, mean a short sidewall for improved steering response and better overall handling.

3 Internal Construction

In this example, the "R" designates this tyre as a radial tyre. Radial tyres have layers of fabric whose cords run at right angles to the circumference of the tyre and whose tread is strengthened by additional layers around the circumference making it the most common type of automotive tyre.

4 Rim Diameter

The wheel (or rim) diameter specifies the size, in inches for which the tyre was sized. In this example, the tyre will fit a 16 inch wheel. Pay particular attention to this number if you plan on changing your wheel size.

5 Load Index

Load Index indicates the maximum load carrying capacity of the tyre; the larger the number, the higher the load capacity. It is very important to only install tyres with a load index that meets or exceeds your vehicle manufacturer's specification.

6 Speed Rating

The speed rating designates the maximum speed at which a properly installed and inflated tyre can be driven on. In this example, the speed rating is V which means it has a speed rating of 240 km/h.

7 U.S. Department of Transportation (DOT) Markings

The DOT code is used by the Department of Transportation (DOT) to track the tyre production for recall purposes. If a tyre proves to be defective, this number helps keep track of where these tyres ended up so buyers can be notified of the problem. This code represents the manufacturer and the plant it was manufactured at (KE) and the size (B0). At the end of the DOT code you will find a four-digit number which stands for the manufacturing date of the tyre. The first two digits stand for the week; the other two for the year. For example, if your tyre has "1616" listed, it was manufactured in the 16th week of 2016.

Tyre Maintenance and Safety

Tyre maintenance can help to improve the performance and extend the life of your Tyres. More importantly, taking just a few minutes a month to inspect your tyres can help you to avoid tyre failures. Some of the key aspects of preventative maintenance include:

1. Inflation Pressure - It's important to maintain the correct inflation pressure in your tyres as under-inflation or over-inflation may lead to a tyre failure. The correct inflation pressure of your tyres is specified by the vehicle manufacturer and is typically shown on the vehicle door ledge or in the owner's manual.

Tyres may lose air over time due to the permeability of rubber so it is important to check your tyre pressure regularly, at least once a month including the spare. Ensure to check the pressure when the tyres are cold (i.e. have not been driven on).

2. Loading - Do not overload your vehicle. Overloading creates excessive stress leading to heat generation and can eventually lead to a tyre failure. Please check the tyre placard or vehicle owner's manual for the maximum recommended load for your vehicle.

Speed Rating

The speed symbol indicates the maximum speed rating at which a tyre can carry a load corresponding to its Load Index under specific service conditions.

For tyres with speed symbols W and Y, "ZR" may or may not appear within the size designation. For tyres with a maximum speed above 186 MPH, a "ZR" must appear in the size designation.

Examples of similar size markings, with and without service descriptions, and showing different maximum speeds are shown.

SPEED RATING AND MAX SPEED EQUIVALENT			
SPEED RATING	MAX SPEED (km/h)	SPEED RATING	MAX SPEED (km/h)
A1	5	K	110
A2	10	L	120
A3	15	M	130
A4	20	N	140
A5	25	P	150
A6	30	Q	160
A7	35	R	170
A8	40	S	180
B	50	T	190
C	60	U	200
D	65	H	210
E	70	V	240
F	80	W	270
G	90	Y	300
J	100	ZR	>240



DYNAMO

SUMMER

PASSENGER

STREET-H	MH01		05
NEW! STREET-H	PRIMA		07
NEW! STREET-H	PRIMA ECO		09
STREET-H	MU02		11
STREET-H	MU71		15

SUV

HISCEND-H	MHT01		17
HISCEND-H	MSU01		19
STREET-H	PURSUIT SUV		21
HISCEND-H	MSU02		23

VAN / COMMERCIAL

HISCEND-H	MC01		25
HISCEND-H	MC02		27
HISCEND-H	VAN		29
HISCEND-H	ML01		31

4X4

OFF ROAD

HISCEND-H	MMT01		33
------------------	-------	-------	----

ALL SEASON

PASSENGER

STREET-H	M4S01		35
-----------------	-------	-------	----

VAN / COMMERCIAL

HISCEND-H	VAN 4S		37
------------------	--------	-------	----

MH01 STREET-H



ECONOMICAL



HANDLING




COMFORT



DRAINAGE




Excellent handling, superior comfort, high-speed stability and low running noise provide a great driving experience.



Noise Emission

The tread block pitch order and shoulder grooves effectively reduce running noise and ensure excellent performance.



Safety

The four main grooves and central rib are designed to provide excellent water drainage to improve driving performance for both wet and dry roads.



Special Tread

The tread is composed of a silica compound which lowers rolling resistance for better fuel economy. The tread pattern is designed for greater handling, thus offering a safer and more comfortable driving experience.

Rim	Size	LI	SR	PR	XL	Fuel efficiency	Wet Grip	Ext. Rolling Noise	Noise Grade	M+S	3PMSF	EPREL Code
13	165/65R13	77	T			D	C	70	B			443024
13	165/70R13	83	T		XL	D	C	71	B			443035
13	175/60R13	77	T			D	C	70	B			443055
13	175/70R13	82	T			D	C	70	B			443101
13	185/60R13	80	T			D	C	70	B			443135
13	185/70R13	86	T			D	C	70	B			444009

Rim	Size	LI	SR	PR	XL	Fuel efficiency	Wet Grip	Ext. Rolling Noise	Noise Grade	M+S	3PMSF	EPREL Code
14	165/60R14	75	H			D	C	70	B			442847
14	165/70R14	85	T		XL	D	C	71	B			443047
14	175/60R14	79	H			D	C	70	B			443060
14	175/65R14	86	T		XL	D	C	71	B			443077
14	175/65R14	86	H		XL	D	C	71	B			443071
14	175/70R14	88	T		XL	D	C	71	B			443112
14	175/70R14	84	T			D	C	70	B			443105
14	185/60R14	82	H			D	C	70	B			443143
14	185/65R14	86	H			D	C	70	B			443989
14	185/70R14	88	H			D	C	70	B			444013
14	195/60R14	86	H			D	B	71	B			444065
14	195/65R14	89	H			D	B	71	B			444088
14	195/70R14	91	T			D	C	71	B			444130
14	205/60R14	88	T			D	C	71	B			444196
14	205/70R14	98	T		XL	C	C	72	B			444242
15	175/65R15	84	H			D	C	70	B			443086
15	185/55R15	82	V			D	C	69	B			443120
15	185/60R15	88	H		XL	D	C	71	B			443962
15	185/60R15	84	H			D	C	70	B			443945
15	185/65R15	92	H		XL	D	C	71	B			444004
15	195/50R15	82	V			D	B	71	B			444033
15	195/55R15	85	V			D	B	71	B			444043
15	195/60R15	88	V			D	B	71	B			444072
15	195/65R15	91	H			D	B	71	B			444091
15	195/65R15	91	V			D	B	71	B			444117
15	195/65R15	95	T		XL	D	B	72	B			444125
15	205/60R15	95	H		XL	D	C	72	B			444211
15	205/65R15	94	V			D	C	71	B			444230
15	205/70R15	96	T			D	C	71	B			444255
15	215/60R15	94	H			D	C	71	B			444305
15	215/65R15	96	V			D	C	71	B			444378
15	215/70R15	98	H			D	C	71	B			444392
16	195/50R16	88	V		XL	D	B	72	B			444038
16	195/60R16	89	V			D	B	71	B			444083
16	205/50R16	87	V			D	C	71	B			444136
16	205/55R16	94	V		XL	D	C	72	B			444152
16	205/55R16	91	V			D	C	71	B			444143
16	205/60R16	92	V			D	C	71	B			444221
16	205/65R16	95	H			D	C	71	B			444237
16	215/55R16	97	H		XL	C	C	72	B			444289
16	215/60R16	95	V			D	C	71	B			444311
16	215/65R16	98	H			D	C	71	B			444383
16	225/50R16	92	V			D	C	71	B			444402
16	225/60R16	98	H			D	C	71	B			444468
16	235/65R16	103	H			C	C	71	B			444536
17	205/50R17	89	V			D	C	71	B			444140
17	215/45R17	91	W		XL	D	C	72	B			444274
17	215/50R17	91	V			D	C	71	B			444284
17	215/55R17	94	V			D	C	71	B			444297
17	215/60R17	96	H			D	C	71	B			444315
17	215/65R17	99	T			D	C	71	B			444387
17	225/45R17	94	W		XL	D	C	72	B			444396
17	225/50R17	94	V			D	C	71	B			444458
17	225/55R17	97	W			D	C	71	B			444462
17	225/60R17	99	H			D	C	71	B			444493
17	235/45R17	97	W		XL	C	C	72	B			444508
17	235/60R17	102	T			C	C	71	B			444516
18	235/40R18	95	W		XL	D	B	71	B			444502
18	235/40R18	91	W			D	B	71	B			444497
18	235/55R18	100	V			D	C	71	B			444511
18	235/60R18	103	H			C	C	71	B			444522
18	235/60R18	107	V		XL	C	C	72	B			444531

NEW!

PRIMA STREET-H



ECONOMICAL



HANDLING




COMFORT



DRAINAGE




Everyday performance.



Confident Wet & Dry Handling

Tread groove design ensures efficient water evacuation and heat dissipation enhancing traction in wet conditions.



Enhanced Mileage & Stability

Asymmetric tread pattern is designed to maximise the contact patch, delivering improved cornering precision and high-speed stability. This also contributes to more even wear and longer tread life.



Balanced Efficiency

Compound technology provides an optimal balance between low rolling resistance and long-lasting wear supporting energy efficiency without sacrificing performance.

Rim	Size	LI	SR	PR	XL	Fuel efficiency	Wet Grip	Ext. Rolling Noise	Noise Grade	M+S	EPREL Code	
14	185/55R14	80	V			D	B	70	B	NO	NO	2419491
14	205/70R14	98	T		XL	C	C	71	B	NO	NO	2419492
15	165/65R15	81	H			D	C	70	B	NO	NO	2419498
15	175/55R15	77	H			D	C	70	B	NO	NO	2419475
15	175/65R15	84	T			D	C	70	B	NO	NO	2419470
15	175/65R15	84	H			D	C	70	B	NO	NO	2419540
15	175/65R15	88	H		XL	D	C	71	B	NO	NO	2419512
15	185/55R15	82	V			D	B	70	B	NO	NO	2419513
15	185/60R15	84	H			D	B	70	B	NO	NO	2419543
15	185/60R15	88	H		XL	D	B	71	B	NO	NO	2419479
15	185/65R15	88	H			D	B	70	B	NO	NO	2419545
15	185/65R15	92	H		XL	C	B	71	B	NO	NO	2419480
15	195/45R15	78	W			D	C	71	B	NO	NO	2419507
15	195/50R15	82	V			D	C	71	B	NO	NO	2419502
15	195/55R15	85	V			D	C	71	B	NO	NO	2419478
15	195/60R15	88	V			D	C	71	B	NO	NO	2419547
15	195/60R15	88	H			D	C	71	B	NO	NO	2419481
15	195/65R15	95	H		XL	C	B	71	B	NO	NO	2419536
15	195/65R15	91	H			D	C	71	B	NO	NO	2419548
15	195/65R15	91	V			D	C	71	B	NO	NO	2419484
15	205/50R15	89	V		XL	D	C	71	B	NO	NO	2419504
15	205/60R15	95	V		XL	C	C	71	B	NO	NO	2419518
15	205/65R15	94	V			C	C	71	B	NO	NO	2419485
15	205/70R15	96	H			C	C	71	B	NO	NO	2419493
15	215/60R15	98	V		XL	C	C	71	B	NO	NO	2419522
15	215/65R15	96	V			C	C	71	B	NO	NO	2419500
15	215/70R15	98	H			C	C	71	B	NO	NO	2419497
15	225/60R15	96	V			C	C	71	B	NO	NO	2419501
16	175/60R16	82	H			D	C	70	B	NO	NO	2419554
16	185/55R16	83	V			D	B	70	B	NO	NO	2419514
16	185/55R16	87	V		XL	D	B	70	B	NO	NO	2419471
16	185/60R16	86	H			D	C	70	B	NO	NO	2419555
16	195/45R16	84	W		XL	D	C	71	B	NO	NO	2419517
16	195/45R16	84	V		XL	D	C	71	B	NO	NO	2419472
16	195/50R16	88	V		XL	D	C	71	B	NO	NO	2419516
16	195/55R16	87	V			D	C	71	B	NO	NO	2419546
16	195/55R16	91	V		XL	D	C	71	B	NO	NO	2419530
16	195/60R16	89	V			D	C	71	B	NO	NO	2419486
16	205/45R16	87	W		XL	D	C	71	B	NO	NO	2419476
16	205/55R16	94	V		XL	C	C	71	B	NO	NO	2419549
16	205/55R16	91	V			D	C	71	B	NO	NO	2419510
16	205/60R16	92	V			C	C	71	B	NO	NO	2419551
16	205/60R16	96	V		XL	C	C	71	B	NO	NO	2419487
16	205/65R16	95	H			C	C	71	B	NO	NO	2419489
16	215/60R16	99	V		XL	C	C	71	B	NO	NO	2419473
16	215/60R16	95	V			C	C	71	B	NO	NO	2419488
16	215/65R16	98	H			C	C	71	B	NO	NO	2419524
16	225/60R16	102	V		XL	C	C	71	B	NO	NO	2419528
16	235/60R16	100	V			C	C	71	B	NO	NO	2419474
17	205/55R17	95	V		XL	0	0	0	0	NO	NO	under development
17	215/65R17	103	V		XL	C	C	71	B	NO	NO	2419556
18	195/60R18	96	V		XL	0	0	0	0	NO	NO	under development
18	215/55R18	99	V		XL	C	C	71	B	NO	NO	2419552

NEW!

PRIMA ECO STREET-H



ECONOMICAL



HANDLING




COMFORT



DRAINAGE




Everyday comfort.



Designed for Comfort

A closed shoulder design reinforces tread block stability, reducing pattern noise and enhancing steering precision for a quieter, more responsive driving experience.



Increased Safety

Three wide circumferential grooves and high-density lateral sipes ensure fast, effective water evacuation improving grip and reducing the risk of aquaplaning in wet conditions.



Better Efficiency

Low rolling resistance compound contributes to reduced fuel consumption, while extending tread life delivering eco-friendly performance.

Rim	Size	LI	SR	PR	XL	Fuel efficiency	Wet Grip	Ext. Rolling Noise	Noise Grade	M+S	3PMSF	EPREL Code
13	145/80R13	75	T			D	C	70	B	NO	NO	2418290
13	155/65R13	73	T			D	B	70	B	NO	NO	2418285
13	155/70R13	75	T			D	C	70	B	NO	NO	2418294
13	155/80R13	79	T			D	C	70	B	NO	NO	2418300
13	165/65R13	77	T			D	C	70	B	NO	NO	2418297
13	165/70R13	79	T			D	C	70	B	NO	NO	2418305
13	165/70R13	83	T		XL	D	C	71	B	NO	NO	2418319
13	165/80R13	83	T			D	C	70	B	NO	NO	2418320
13	175/70R13	82	T			D	C	70	B	NO	NO	2418313
13	185/70R13	86	T			D	C	70	B	NO	NO	2418339
14	155/65R14	75	T			D	C	70	B	NO	NO	2418293
14	165/60R14	75	H			D	C	70	B	NO	NO	2418296
14	165/65R14	79	T			D	C	70	B	NO	NO	2418303
14	165/70R14	85	T		XL	D	C	71	B	NO	NO	2418327
14	165/70R14	81	T			D	C	70	B	NO	NO	2418306
14	165/80R14	85	T			D	C	70	B	NO	NO	2418333
14	175/65R14	86	T		XL	D	C	71	B	NO	NO	2418334
14	175/65R14	82	T			D	C	70	B	NO	NO	2418309
14	175/70R14	88	T		XL	D	B	71	B	NO	NO	2418346
14	175/70R14	84	T			D	C	70	B	NO	NO	2418324
14	185/60R14	82	H			D	C	70	B	NO	NO	2418316
14	185/65R14	86	H			D	C	70	B	NO	NO	2418337
14	185/70R14	88	T			D	C	70	B	NO	NO	2418348
14	185/70R14	88	H			D	C	70	B	NO	NO	2418357
14	195/60R14	86	H			D	B	71	B	NO	NO	2418345
14	195/65R14	89	H			D	B	71	B	NO	NO	2418361
14	195/70R14	91	T			D	B	71	B	NO	NO	2419467
15	165/60R15	77	H			D	C	70	B	NO	NO	2419468



MU02 STREET-H



ECONOMICAL



HANDLING



Noise



RIM PROTECTION



ANTI-SKID




MU02's tread compound is specially designed to ensure excellent rolling resistance as well as a stronger apex to prevent damage to the bead.



Wet Performance

The tread's four main grooves efficiently drain water for improved safety in wet weather conditions.



Handling Performance

The inner tread elements provide stronger grip on both wet and dry roads.



Shoulder Design

The external shoulder blocks provide ideal rigidity and excellent handling.

Rim	Size	LI	SR	PR	XL	Fuel efficiency	Wet Grip	Ext. Rolling Noise	Noise Grade	M+S	3PMSF	EPREL Code
16	195/55R16	91	V		XL	D	B	71	B			444669
16	205/45ZR16	87	W		XL	D	B	71	B			444802
16	205/50ZR16	87	W			D	B	71	B			444823
16	205/55ZR16	94	W		XL	D	B	71	B			444844
16	205/60R16	92	V			D	B	71	B			444862
16	205/65R16	95	V			D	A	71	B			444888
16	215/55ZR16	97	W		XL	C	B	71	B			445791
16	225/55ZR16	99	W		XL	C	B	71	B			445860
16	225/60R16	98	V			D	B	71	B			445872
16	235/60R16	100	V			D	B	71	B			445936
17	205/40ZR17	84	W		XL	D	B	71	B			444724
17	205/45ZR17	88	W		XL	D	B	71	B			444814
17	205/50ZR17	93	W		XL	D	B	71	B			444837
17	215/40ZR17	87	W		XL	D	B	71	B			444945
17	215/45ZR17	91	W		XL	D	B	71	B			445047
17	215/50ZR17	95	W		XL	D	B	71	B			445057
17	215/55ZR17	94	W			D	B	71	B			445795
17	225/45ZR17	94	W		XL	D	B	71	B			445848
17	225/50ZR17	98	W		XL	D	B	71	B			445856
17	225/55ZR17	101	W		XL	C	B	71	B			445867
17	235/45ZR17	97	W		XL	D	B	72	B			445892
17	235/50ZR17	100	W		XL	C	B	72	B			445914
17	235/55ZR17	103	W		XL	C	B	72	B			445930
17	245/40ZR17	95	W		XL	D	B	72	B			446007
17	245/45ZR17	99	W		XL	C	B	72	B			446023
18	205/40ZR18	82	W			D	B	71	B			444783
18	215/35ZR18	84	Y		XL	D	B	71	B			444924
18	225/40ZR18	92	W		XL	D	B	71	B			445840
18	225/45ZR18	95	Y		XL	D	B	71	B			445852
18	235/40ZR18	95	W		XL	D	B	72	B			445885
18	235/45ZR18	98	Y		XL	C	B	72	B			445896
18	235/50ZR18	101	W		XL	C	B	72	B			445921
18	245/40ZR18	97	Y		XL	C	B	72	B			446012
18	245/45ZR18	100	W		XL	D	B	72	B			446028
18	255/35ZR18	94	Y		XL	D	B	73	B			446044



MU02 STREET-H

Rim	Size	LI	SR	PR	XL	Fuel efficiency	Wet Grip	Ext. Rolling Noise	Noise Grade	M+S	3PMSF	EPREL Code
19	205/55R19	97	V		XL	C	B	71	B			724566
19	225/35ZR19	88	Y		XL	D	B	72	B			445799
19	225/40ZR19	93	Y		XL	D	B	71	B			445843
19	235/35ZR19	91	Y		XL	D	B	72	B			445878
19	235/45ZR19	99	W		XL	C	B	72	B			445905
19	245/35ZR19	93	Y		XL	D	B	72	B			445955
19	245/40ZR19	98	Y		XL	C	B	72	B			446018
19	245/45ZR19	102	Y		XL	C	B	72	B			446031
19	255/35ZR19	96	Y		XL	D	B	73	B			446050
19	255/50ZR19	107	Y		XL	C	B	73	B			446060
19	265/30ZR19	93	Y		XL	D	B	73	B			446064
19	275/30ZR19	96	Y		XL	D	B	73	B			446072
19	275/35ZR19	100	Y		XL	D	B	73	B			446082
19	275/45ZR19	108	Y		XL	C	B	73	B			446095
19	285/30ZR19	98	Y		XL	C	B	73	B			1182070
19	285/45ZR19	111	Y		XL	C	B	73	B			446109
20	195/55R20	95	H		XL	C	B	71	B			724590
20	225/35ZR20	90	Y		XL	D	B	72	B			445806
20	245/30ZR20	90	Y		XL	D	B	72	B			445945
20	245/35ZR20	95	Y		XL	D	B	72	B			446004
20	245/45ZR20	103	Y		XL	C	B	72	B			446036
20	255/45ZR20	105	Y		XL	C	B	73	B			446054
20	265/35ZR20	99	Y		XL	C	B	73	B			724605
20	275/30ZR20	97	Y		XL	D	B	73	B			446078
20	275/40ZR20	106	Y		XL	C	B	73	B			446086
20	275/45ZR20	110	Y		XL	C	B	73	B			446101
20	285/30ZR20	99	Y		XL	C	B	73	B			1182071
21	275/30ZR21	98	Y		XL	C	B	73	B			1058638
21	275/35ZR21	103	Y		XL	C	B	73	B			1058642
21	285/35ZR21	105	Y		XL	C	B	73	B			446106
21	295/35ZR21	107	Y		XL	C	B	73	B			446114
21	325/30ZR21	108	Y		XL	C	B	73	B			446122

XL: Extra Load | LI: Load Index | SS: Speed Symbol | UTQG: Uniform Tyre Quality Grade | BSW: Black Sidewall

MU02 RUN-FLAT

RFT Product Features:

1. Greater safety and the driver will not be delayed or stranded on remote highways because of a flat tyre.
2. Avoid accidents caused by the loss of control from punctures or air leaks: when the tyre is flat, even if all the air pressure has leaked from the tyre, the vehicle will continue to drive at normal speeds without having to be replaced immediately.
3. Even when your tyre begins leaking air you can drive to your local tyre dealer to have it repaired. RFT technology also means there is no need to carry a spare which helps increase storage space within the vehicle.

INFLATED TYRE



DEFLATED TYRE



STANDARD TYRE

RUN-FLAT TYRE

Rim	Size	LI	SR	PR	XL	Fuel efficiency	Wet Grip	Ext. Rolling Noise	Noise Grade	M+S	3PMSF	EPREL Code
16	195/55RF16	91	V		XL	D	B	71	B			446123
16	205/55ZRF16	94	W		XL	D	B	71	B			446134
16	225/55ZRF16	99	W		XL	D	B	71	B			446166
17	205/50ZRF17	93	W		XL	D	B	71	B			446128
17	225/45ZRF17	94	W		XL	D	B	71	B			446144
17	225/50ZRF17	98	W		XL	D	B	71	B			446159
17	225/55ZRF17	101	W		XL	D	B	71	B			446172
18	225/40ZRF18	92	W		XL	D	B	71	B			446139
18	225/45ZRF18	95	W		XL	D	B	71	B			446149
18	245/40ZRF18	97	W		XL	D	B	72	B			446186
18	245/45ZRF18	100	W		XL	D	B	72	B			446194
18	245/50ZRF18	100	Y			D	B	71	B			446222
19	235/45ZRF19	99	W		XL	D	B	72	B			446178
19	245/45ZRF19	102	W		XL	D	B	72	B			446218
19	255/50RF19	103	V			D	B	72	B			446227

MU71 STREET-H



ECONOMICAL



HANDLING



NOISE



RIM PROTECTION



ANTI-SKID



The next generation of UHP performance, the MU71 is designed for exceptional handling performance in wet and dry weather while also boasting a longer tread life.



Wet Performance

The tread's four main grooves efficiently drain water for improved safety in wet weather conditions.



Handling Performance

The interconnected tread shoulder improves shoulder durability for precision turning and handling performance.



Shoulder Design

Tread body is equipped with a double-layer ply which helps to protect the sidewall, improve support and promote even tread wear.

Rim	Size	LI	SR	PR	XL	Fuel efficiency	Wet Grip	Ext. Rolling Noise	Noise Grade	M+S	3PMSF	EPREL Code
16	215/55ZR16	97	W		XL	C	A	70	B	N	N	
16	225/55ZR16	99	W		XL	C	A	70	B	N	N	
16	205/55ZR16	91	Y			C	A	71	B	N	N	
16	205/55ZR16	94	Y		XL	C	A	71	B	N	N	
17	215/45ZR17	91	Y		XL	C	A	70	B	N	N	
17	215/50ZR17	95	W		XL	C	A	70	B	N	N	
17	215/55ZR17	98	W		XL	C	A	70	B	N	N	
17	225/45ZR17	94	Y		XL	C	A	70	B	N	N	
17	225/50ZR17	98	W		XL	C	A	70	B	N	N	
17	225/55ZR17	101	W		XL	C	A	70	B	N	N	
17	235/45ZR17	97	Y		XL	C	A	70	B	N	N	
17	205/50ZR17	93	W		XL	C	A	71	B	N	N	
17	205/40ZR17	84	Y		XL	C	A	71	B	N	N	
17	205/45ZR17	88	W		XL	C	A	71	B	N	N	
17	235/50ZR17	100	W		XL	C	A	71	B	N	N	
17	245/45ZR17	99	Y		XL	C	A	71	B	N	N	
18	225/45ZR18	95	Y		XL	C	A	70	B	N	N	
18	235/45ZR18	98	Y		XL	C	A	70	B	N	N	
18	245/40ZR18	97	Y		XL	C	A	70	B	N	N	
18	245/45ZR18	100	Y		XL	C	A	70	B	N	N	
18	225/50ZR18	99	Y		XL	C	A	71	B	N	N	
18	235/50ZR18	101	Y		XL	C	A	71	B	N	N	
18	215/50ZR18	96	W		XL	C	A	71	B	N	N	
18	225/40ZR18	92	Y		XL	C	A	71	B	N	N	
18	235/40ZR18	95	Y		XL	C	A	71	B	N	N	
18	255/35ZR18	94	Y		XL	C	A	71	B	N	N	
18	255/45ZR18	103	Y		XL	C	A	71	B	N	N	
18	265/35ZR18	97	Y		XL	C	A		B	N	N	
18	215/45ZR18	93	Y		XL	C	A	71	B	N	N	
18	275/40ZR18	103	Y		XL	C	A	71	B	N	N	
18	215/40ZR18	89	Y		XL	C	A		B	N	N	
18	225/35ZR18	87	Y		XL	C	A		B	N	N	
18	205/40ZR18	86	Y		XL	C	A		B	N	N	
18	255/40ZR18	99	Y		XL	C	A		B	N	N	
19	245/45ZR19	102	Y		XL	C	A	70	B	N	N	
19	225/45ZR19	96	Y		XL	C	A	71	B	N	N	
19	255/45ZR19	104	Y		XL	C	A	71	B	N	N	
19	285/40ZR19	107	Y		XL	C	A	71	B	N	N	
19	285/30ZR19	98	Y		XL	C	A	71	B	N	N	
19	255/35ZR19	96	Y		XL	C	A	71	B	N	N	
19	235/40ZR19	96	Y		XL	C	A	71	B	N	N	
19	225/40ZR19	93	Y		XL	C	A	71	B	N	N	
19	235/45ZR19	99	Y		XL	C	A	71	B	N	N	
19	235/35ZR19	91	Y		XL	C	A	71	B	N	N	
19	245/40ZR19	98	Y		XL	C	A	71	B	N	N	
19	255/40ZR19	100	Y		XL	C	A	71	B	N	N	
19	265/35ZR19	98	Y		XL	C	A	71	B	N	N	
19	275/35ZR19	100	Y		XL	C	A	71	B	N	N	
19	275/40ZR19	105	Y		XL	C	A	71	B	N	N	
19	245/35ZR19	93	Y		XL	C	A	71	B	N	N	
19	225/35ZR19	88	Y		XL	C	A		B	N	N	
19	205/55R19	97	V		XL	C	A		B	N	N	
19	245/30ZR19	89	Y		XL	C	A		B	N	N	
20	275/45ZR20	110	Y		XL	C	A	71	B	N	N	
20	315/35ZR20	110	Y		XL	C	A	71	B	N	N	
20	305/40ZR20	112	Y		XL	C	A	71	B	N	N	
20	245/35ZR20	95	Y		XL	C	A	71	B	N	N	
20	235/45ZR20	100	W		XL	C	A	71	B	N	N	
20	245/40ZR20	99	Y		XL	C	A	71	B	N	N	
20	245/45ZR20	103	Y		XL	C	A	71	B	N	N	
20	255/40ZR20	101	Y		XL	C	A	71	B	N	N	
20	255/45ZR20	105	Y		XL	C	A	71	B	N	N	
20	275/35ZR20	102	Y		XL	C	A	71	B	N	N	
20	275/40ZR20	106	Y		XL	C	A	71	B	N	N	
20	275/30ZR20	97	Y		XL	C	A		B	N	N	
20	255/35ZR20	97	Y		XL	C	A		B	N	N	
20	255/30ZR20	92	Y		XL	C	A		B	N	N	
20	235/35ZR20	92	Y		XL	C	A		B	N	N	
20	245/30ZR20	90	Y		XL	C	A		B	N	N	
STREET-H MU71 EV												
18	235/45ZR18	98	W		XL	B	A	71	B	N	N	
20	255/40ZR20	101	W		XL	B	A	71	B	N	N	



MHT01 HISCEND-H



HANDLING



CROSS-COUNTRY



BRAKING



WEAR RESISTANCE




High performance SUV and pickup truck tyre with excellent durability and handling efficiency.




Tread Compound

Special tread compound improves abrasion resistance and grip for better handling.



Safety

Wide tread grooves and small cut block grooves ensure a safe ride by effectively draining water for better traction.



Sidewall Design

The sidewall structure and ladder-like grooves on the shoulder allow the tyre to conquer any challenge on both paved and non-paved roads.

Rim	Size	LI	SR	PR	XL	Fuel efficiency	Wet Grip	Ext. Rolling Noise	Noise Grade	M+S	3PMSF	EPREL Code
16	255/70R16	111	T			C	D	72	B	YES		443878
16	265/70R16	112	T			C	D	72	B	YES		443328
16	265/75R16	116	T			C	D	72	B	YES		443875
17	265/65R17	112	T			C	D	72	B	YES		443224
17	265/70R17	115	T			C	D	72	B	YES		443901
18	255/70R18	113	T			C	D	72	B	YES		443927
18	265/60R18	110	H			D	D	72	B	YES		443270
18	275/65R18	116	T			C	D	72	B	YES		443946
20	275/45R20	110	H		XL	C	D	73	B	YES		443953
20	275/55R20	113	H			C	D	72	B	YES		443959
20	275/60R20	115	T			C	D	72	B	YES		443280

MSU01 HISCEND-H



HANDLING



DRAINAGE



NOISE



BRAKING



HIGH DURABILITY



Specially designed UHP SUV tyre.




Safety

The center rib design provides greater traction for safer acceleration and braking.



Wear Resistance

The silica compound tread improves wear resistance.



Comfortable Ride

The tread block pitch and built-in sipes reduce tyre vibration and noise for a more comfortable ride.



Rim	Size	LI	SR	PR	XL	Fuel efficiency	Wet Grip	Ext. Rolling Noise	Noise Grade	M+S	3PMSF	EPREL Code
17	235/55R17	103	W		XL	D	B	72	B			444568
18	215/50R18	92	W			D	B	71	B			758065
18	225/50R18	99	Y		XL	C	B	72	B			753226
18	225/55R18	102	W		XL	D	B	72	B			444507
18	225/60R18	100	V			D	B	71	B			444549
18	235/50R18	97	V			D	B	71	B			444563
18	235/55R18	104	W		XL	C	B	72	B			444591
18	235/60R18	107	W		XL	C	B	72	B			444606
18	245/60R18	105	V			D	B	71	B			444634
18	255/55R18	109	Y		XL	C	B	72	B			444757
18	255/60R18	112	V		XL	C	B	72	B			444828
18	265/60R18	110	V			C	B	71	B			444967
18	275/40R18	103	W		XL	D	B	71	B			444995
19	225/45R19	96	W		XL	C	B	72	B			444492
19	235/55R19	101	W			D	B	71	B			444598
19	245/50R19	105	W		XL	C	B	71	B			724626
19	245/55R19	103	V			D	B	71	B			444627
19	255/55R19	111	Y		XL	C	B	72	B			444796
19	265/50R19	110	Y		XL	C	B	71	B			444870
20	235/50R20	104	Y		XL	C	B	71	B			724628
20	255/40R20	101	Y		XL	D	B	72	B			444664
20	255/45R20	105	Y		XL	C	B	71	B			444696
20	255/50R20	109	Y		XL	B	B	71	B			444723
20	255/55R20	110	Y		XL	C	B	72	B			444813
20	265/50R20	111	Y		XL	C	B	71	B			444882
20	275/35R20	102	W		XL	D	B	71	B			444980
20	275/55R20	117	W		XL	C	B	71	B			445034
20	275/60R20	119	V		XL	C	B	71	B			445056
20	285/40R20	104	Y			D	B	73	B			445078
20	285/50R20	116	W		XL	C	B	73	B			445102
20	295/35R20	105	Y		XL	D	B	73	B			445781
21	245/45R21	104	Y		XL	C	B	71	B			724676
21	255/40R21	102	Y		XL	C	B	71	B			724685
21	265/40R21	105	Y		XL	C	B	71	B			724704
21	265/45R21	108	Y		XL	C	B	71	B			724809
21	275/40R21	107	Y		XL	C	B	73	B			724784
21	275/45R21	110	Y		XL	C	B	71	B			445014
21	285/40R21	109	Y		XL	C	B	73	B			724800
21	315/35R21	111	Y		XL	C	B	73	B			735210
22	265/35R22	102	Y		XL	C	B	71	B			724826
22	285/35R22	106	Y		XL	C	B	73	B			724838
22	285/45R22	114	W		XL	C	B	73	B			445089
22	305/40R22	114	W		XL	C	B	73	B			445787
22	305/45R22	118	W		XL	C	B	73	B			445794



PURSUIT SUV STREET-H



HANDLING



DRAINAGE



NOISE



BRAKING



HIGH DURABILITY

Ultra-high performance tyre designed for SUV.



Safety

Four wide longitudinal grooves and horizontal grooves on the shoulders can quickly evacuate water and provide excellent anti-slip performance.

Comfort

Tread pattern design to reduce noise resonance for a quiet ride.

Mileage

Upgraded compound effectively balances wear resistance and rolling resistance performance while improving tyre grip.

Rim	Size	LI	SR	PR	XL	Fuel efficiency	Wet Grip	Ext. Rolling Noise	Noise Grade	M+S	3PMSF	EPREL Code
19	235/50R19	99	W							N	N	
19	235/55R19	105	W		XL					N	N	
19	255/50R19	107	W		XL					N	N	
19	225/55R19	103	W		XL					N	N	
19	255/55R19	111	W		XL					N	N	
19	265/50R19	110	W		XL					N	N	
20	235/50R20	104	W		XL					N	N	
20	255/50R20	109	W		XL					N	N	
20	255/55R20	110	W		XL					N	N	
20	265/45R20	108	W		XL					N	N	
20	285/40R20	108	W		XL					N	N	
20	285/45R20	112	W		XL					N	N	
21	275/45R21	110	W		XL					N	N	
21	245/40R21	100	W		XL					N	N	
21	255/35R21	98	W		XL					N	N	
21	265/40R21	105	W		XL					N	N	
21	265/45R21	108	W		XL					N	N	
21	275/35R21	103	W		XL					N	N	
21	275/40R21	107	W		XL					N	N	
21	285/40R21	109	W		XL					N	N	
21	285/45R21	113	W		XL					N	N	
21	295/35R21	107	W		XL					N	N	
21	315/35R21	111	W		XL					N	N	
21	315/40R21	115	W		XL					N	N	
22	265/40R22	106	W		XL					N	N	
22	275/35R22	104	W		XL					N	N	
22	275/40R22	107	W		XL					N	N	
22	285/40R22	110	W		XL					N	N	
22	285/45R22	114	W		XL					N	N	
22	315/30R22	107	W		XL					N	N	

Available soon

MSU02 HISCEND-H



HANDLING



DRAINAGE



NOISE



BRAKING



HIGH DURABILITY



A UHP SUV product with an offset lateral arrangement of pattern blocks and fine grooves that effectively reduce noise and improve driving comfort.



Safety

The wide center rib design offers great traction when accelerating and braking for a safe driving experience.



Wet Performance

The greater ratio of grooves provide better drainage capabilities for improved handling and grip in wet weather conditions. The tread compound also improves wet grip and reduces the rolling resistance for increased fuel economy.



Block Design

An optimized pitch and sipe pattern arrangement effectively reduces noise for a more comfortable ride.

MSU02 HISCEND-H

Rim	Size	LI	SR	PR	XL	Fuel efficiency	Wet Grip	Ext. Rolling Noise	Noise Grade	M+S	3PMSF	EPREL Code
17	255/60R17	106	H			C	C	72	B			443157
18	225/60R18	100	V			D	B	71	B			443115
18	235/50R18	97	V			C	C	71	B			443107
19	235/50R19	103	W		XL	C	C	72	B			443127
19	235/55R19	101	W			C	C	71	B			443139
19	245/55R19	103	V			C	C	71	B			443078
22	305/40R22	114	W		XL	C	B	72	A			443098

XL: Extra Load | LI: Load Index | SS: Speed Symbol | UTQG: Uniform Tyre Quality Grade | BSW: Black Sidewall

MSU02 RUN-FLAT

RFT Product Features:

1. Greater safety and the driver will not be delayed or stranded on remote highways because of a flat tyre.
2. Avoid accidents caused by the loss of control from punctures or air leaks: when the tyre is flat, even if all the air pressure has leaked from the tyre, the vehicle will continue to drive at normal speeds without having to be replaced immediately.
3. Even when your tyre begins leaking air you can drive to your local tyre dealer to have it repaired. RFT technology also means there is no need to carry a spare which helps increase storage space within the vehicle.



Rim	Size	LI	SR	PR	XL	Fuel efficiency	Wet Grip	Ext. Rolling Noise	Noise Grade	M+S	3PMSF	EPREL Code
18	235/50RF18	97	V			D	C	71	B			443979
18	255/55RF18	105	H			D	C	72	B			601483

XL: Extra Load | LI: Load Index | SS: Speed Symbol | UTQG: Uniform Tyre Quality Grade | BSW: Black Sidewall

MC01 HISCEND-H



WEAR RESISTANCE



HANDLING




PUNCTURE RESISTANT



RESILIENT




The MC01 is specially designed to provide excellent performance on wet roads and offers increased load bearing capabilities for light truck vehicles.



Commercial Utilization

The applied tread compound and optimized pattern design provide great load bearing capabilities.



Tread Life

The unique tread compound increases wear resistance while deep grooves provide a longer service life.



Wet Performance

Wide, zig-zagging main grooves effectively siphon water for excellent driving performance on wet roads.



Rim	Size	LI	SR	PR	XL	Fuel efficiency	Wet Grip	Ext. Rolling Noise	Noise Grade	M+S	3PMSF	EPREL Code
14	175/70R14C	95/93	R	6PR		C	B	72	B			444414
14	185R14C	102/100	Q	8PR		C	B	72	B			444399
14	195R14C	106/104	Q	8PR		C	B	72	B			444408
15	185R15C	103/102	R	8PR		C	B	72	B			444418
15	195R15C	106/104	R	8PR		C	C	72	B			444424



MC02 HISCEND-H



HANDLING



PUNCTURE RESISTANT



RESILIENT



WEAR RESISTANCE



Specially designed pattern for commercial light trucks, minivans, and minibuses that offers outstanding handling on wet surfaces as well as excellent high speed durability.




Driving Comfort

The tread has a varied pitch design created to reduce noise and allow for a better driving experience.



Tread Pattern

Original pattern design ensures excellent performance and greater driving comfort on wet and dry roads.



Tread Design

Wide and deep grooves increase wear resistance, efficiently drain water, and provide greater handling and stability.

Rim	Size	LI	SR	PR	XL	Fuel efficiency	Wet Grip	Ext. Rolling Noise	Noise Grade	M+S	3PMSF	EPREL Code
12	145R12C	86/84	P	8PR		D	B	72	B			444959
12	155R12C	88/86	P	8PR		D	B	72	B			444450
13	155R13C	85/83	Q	6PR		D	B	72	B			444473
13	165/70R13C	88/86	Q	6PR		D	B	72	B			444475
13	165R13C	94/93	S	8PR		D	B	72	B			444479
13	175R13C	97/95	S	8PR		D	B	72	B			444483
14	175/65R14C	90/88	T	6PR		D	B	72	B			444489
14	175/70R14C	95/93	Q	6PR		D	B	72	B			444496
14	175R14C	99/98	Q	8PR		D	B	72	B			444501
14	185R14C	102/100	Q	8PR		C	B	72	B			444509
14	195R14C	106/104	Q	8PR		C	B	72	B			444519
14	205/75R14C	109/107	Q	8PR		C	B	72	B			444437
14	205R14C	109/107	R	8PR		C	B	72	B			444528
15	185R15C	103/102	R	8PR		C	B	72	B			444534
15	195/70R15C	104/102	R	8PR		C	B	72	B			444551
15	195R15C	106/104	R	8PR		C	B	72	B			444560
15	205/65R15C	102/100	R	6PR		C	B	72	B			444566
15	205/70R15C	106/104	R	8PR		C	B	72	B			444570
15	215/65R15C	104/102	T			C	B	70	B			967177
15	215/70R15C	109/107	S	8PR		C	B	72	B			444625
15	215R15C	109/107	R	8PR		C	B	72	B			444446
15	225/70R15C	112/110	R	8PR		C	B	72	B			444637
16	175R16C	101/99	R	8PR		D	B	72	B			444657
16	185/75R16C	104/102	R	8PR		C	B	72	B			444667
16	195/60R16C	99/97	T	6PR		C	B	72	B			444693
16	195/65R16C	104/102	R	8PR		C	B	72	B			444710
16	195/75R16C	107/105	R	8PR		C	B	72	B			444740
16	205/65R16C	107/105	R	8PR		C	B	72	B			444767
16	205/75R16C	110/108	R	8PR		C	B	72	B			444793
16	205/75R16C	113/111	R	10PR		C	B	72	B			1091906
16	205R16C	110/108	R	8PR		C	B	72	B			444808
16	215/60R16C	108/106	T	8PR		C	B	72	B			444817
16	215/65R16C	109/107	R	8PR		C	B	72	B			444827
16	215/70R16C	108/106	Q	6PR		C	B	72	B			444867
16	215/75R16C	116/114	R	10PR		C	B	72	B			444875
16	225/65R16C	112/110	R	8PR		C	B	72	B			444890
16	225/75R16C	121/120	R	10PR		C	B	72	B			444899
16	235/65R16C	115/113	R	8PR		C	B	72	B			444928
17	215/60R17C	109/107	T			C	B	70	B			967175
17	225/55R17C	109/107	H			C	B	70	B			1066124
17	225/70R17C	112/110	R	6PR		C	B	72	B			444947



VAN HISCEND-H



HANDLING



PUNCTURE RESISTANT




RESILIENT



WEAR RESISTANCE



Durable summer van tyre for commercial vans.

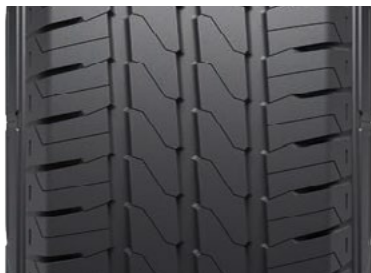

Strengthened sidewall construction enhances durability and stability.

Enhanced sidewall protection design reinforces impact and puncture resistance elevating safety and reducing tyre fail.

Flat tread contour maximizes contact area, extending tyre life and mileage.

Refined the internal design to bolster bead rigidity, minimize heat buildup, and enhance tyre durability.

Impressive safety A-Rated wet performance¹.

Advanced tread compound ensures exceptional wet weather performance.

Low noise and increased comfort.

Modern pattern design minimizes noise, elevates driving comfort, and lessens environmental impact.

Rim	Size	LI	SR	PR	XL	Fuel efficiency	Wet Grip	Ext. Rolling Noise	Noise Grade	M+S	3PMSF	EPREL Code
14	175/65R14C	90/88	T	6PR						N	N	
15	195/70R15C	104/102	R	8PR						N	N	
15	215/65R15C	104/102	T	6PR						N	N	
15	205/65R15C	102/100	T	6PR						N	N	
15	225/70R15C	112/110	S	8PR						N	N	
15	215/70R15C	109/107	S	8PR						N	N	
15	205/70R15C	106/104	R	8PR						N	N	
16	235/65R16C	121/119	R	10PR						N	N	
16	205/65R16C	107/105	T	8PR						N	N	
16	215/65R16C	109/107	T	8PR						N	N	
16	225/75R16C	121/120	R	10PR						N	N	
16	195/75R16C	110/108	R	10PR						N	N	
16	205/75R16C	113/111	T	10PR						N	N	
16	195/65R16C	104/102	T	8PR						N	N	
16	215/60R16C	103/101	T	6PR						N	N	
16	225/65R16C	112/110	T	8PR						N	N	
16	215/75R16C	116/114	R	10PR						N	N	
16	195/60R16C	99/97	H	6PR						N	N	
17	225/55R17C	109/107	H	8PR						N	N	
17	215/60R17C	109/107	T	8PR						N	N	
17	235/60R17C	117/115	R	10PR						N	N	

Available soon



ML01 HISCEND-H



HANDLING



PUNCTURE RESISTANT



RESILIENT



WEAR RESISTANCE




Flexible handling and longer running tyre specifically designed for light trucks.



Carrying Capacity

This specialty tyre is designed with a reinforced carcass to improve its load bearing capability.



Wet Performance

The three main grooves improve effectively siphon water to grip on wet roads.



Tread Life

The tread composition and pattern design is optimized to improve wear resistance for a longer service life.

Rim	Size	LI	SR	PR	XL	Fuel efficiency	Wet Grip	Ext. Rolling Noise	Noise Grade	M+S	3PMSF	EPREL Code
15	6.50R15LT	106/101	N	10PR		D	B	72	B			445786
16	6.50R16LT	107/102	N	10PR		D	B	72	B			445797
16	7.00R16LT	115/110	N	12PR		C	B	72	B			445802

MMT01 HISCEND-H



OFF ROAD
CAPABLE



CROSS-COUNTRY



HIGH DURABILITY



PUNCTURE RESISTANT



RESILIENT

The MMT01 is specially designed for cross-country enthusiasts.



Strengthened Carcass

The three ply carcass makes this tyre extremely strong and capable of handling strong impacts.



Sidewall Design

The shield-like design extending up from the sidewall improves traction and further protects the sidewall from damage.



Shoulder Grooves

Open shoulder design with large and deep grooves allows for easier expulsion of mud when traveling at low and high speeds. These changes effectively improve the tyre's self-cleaning performance and grip capabilities when traveling on rugged and rocky roads.



Shoulder Blocks

Wide and deep shoulder grooves effectively increase the tyre's self-cleaning capabilities and offer improved grip on rugged and rocky roads.

Rim	Size	LI	SR	PR	XL	Fuel efficiency	Wet Grip	Ext. Rolling Noise	Noise Grade	M+S	3PMSF	EPREL Code
15	30×9.50R15LT	104	Q	6PR		POR	POR	POR	POR	YES		
15	31×10.50R15LT	109	Q	6PR		POR	POR	POR	POR	YES		
15	33×12.50R15LT	108	Q	6PR		POR	POR	POR	POR	YES		
15	35×12.50R15LT	113	Q	6PR		POR	POR	POR	POR	YES		
15	LT235/75R15	104/101	Q	6PR		POR	POR	POR	POR	YES		
16	LT235/85R16	120/116	Q	10PR		POR	POR	POR	POR	YES		
16	LT245/75R16	120/116	Q	10PR		POR	POR	POR	POR	YES		
17	33×12.50R17LT	114	Q	8PR		POR	POR	POR	POR	YES		
17	35×12.50R17LT	121	Q	10PR		POR	POR	POR	POR	YES		
17	LT265/70R17	121/118	Q	10PR		POR	POR	POR	POR	YES		
17	LT285/70R17	121/118	Q	10PR		POR	POR	POR	POR	YES		
18	33×12.50R18LT	118	Q	10PR		POR	POR	POR	POR	YES		
18	35×12.50R18LT	123	K	10PR		POR	POR	POR	POR	YES		
20	33×12.50R20LT	114	Q	10PR		POR	POR	POR	POR	YES		
20	35×12.50R20LT	121	Q	10PR		POR	POR	POR	POR	YES		
20	LT305/55R20	121/118	Q	10PR		POR	POR	POR	POR	YES		



M4S01 STREET-H



COMFORT



SNOW TRACTION



HANDLING



SKID RESISTANT



M+S



Specially designed all season tyre.



Noise Emissions

Tread pitch is designed to effectively reduce noise emissions for a quiet driving experience.




Inner Tread

Improved handling on wet and snowy roads while also improving grip and braking efficiency.



All-Season Versatility

Tread and groove design ensures handling, grip, and stability for all seasons.



Outer Tread

Improved handling and stability on dry roads.

Rim	Size	LI	SR	PR	XL	Fuel efficiency	Wet Grip	Ext. Rolling Noise	Noise Grade	M+S	3PMSF	EPREL Code
13	155/70R13	75	T			D	C	71	B	YES	YES	439102
13	155/80R13	79	T			D	C	71	B	YES	YES	439118
14	155/65R14	75	T			D	C	71	B	YES	YES	439105
14	165/60R14	79	H		XL	D	C	71	B	YES	YES	439111
14	165/65R14	79	T			D	C	71	B	YES	YES	439107
14	165/70R14	85	T		XL	D	C	71	B	YES	YES	439109
14	175/65R14	82	T			D	C	71	B	YES	YES	439120
14	175/70R14	84	T			D	C	71	B	YES	YES	439112
14	175/70R14	88	T		XL	D	C	71	B	YES	YES	439125
14	185/60R14	82	T			D	C	71	B	YES	YES	439128
14	185/65R14	86	T			D	C	71	B	YES	YES	439130
15	175/65R15	84	H			D	C	71	B	YES	YES	439133
15	185/55R15	82	H			D	C	71	B	YES	YES	439135
15	185/60R15	88	H		XL	D	C	71	B	YES	YES	439137
15	185/65R15	88	H			D	C	71	B	YES	YES	439138
15	195/50R15	82	H			D	C	72	B	YES	YES	439140
15	195/55R15	85	H			D	C	72	B	YES	YES	439145
15	195/60R15	88	H			D	C	72	B	YES	YES	439153
15	195/65R15	91	H			D	C	72	B	YES	YES	439163
16	195/55R16	91	V		XL	D	C	72	B	YES	YES	1420450
16	205/45R16	87	V		XL	D	C	72	B	YES	YES	439183
16	205/55R16	94	V		XL	D	B	72	B	YES	YES	439220
16	205/60R16	96	V		XL	D	B	72	B	YES	YES	439192
16	215/55R16	97	V		XL	D	B	72	B	YES	YES	439198
16	215/60R16	99	V		XL	C	B	72	B	YES	YES	439208
16	225/55R16	99	V		XL	C	B	72	B	YES	YES	439211
17	205/50R17	93	V		XL	D	C	72	B	YES	YES	439225
17	225/45R17	94	V		XL	D	B	72	B	YES	YES	439224
17	225/45R17	94	Y		XL	D	B	72	B	YES	YES	1420463
17	225/50R17	98	Y		XL	C	B	72	B	YES	YES	1420475

XL: Extra Load | LI: Load Index | SS: Speed Symbol | UTQG: Uniform Tyre Quality Grade | BSW: Black Sidewall



VAN 4S HISCEND-H



HANDLING



PUNCTURE RESISTANT



RESILIENT



WEAR RESISTANCE



The VAN 4S is an all-season tyre created specifically for commercial applications.



Wet Performance

Main tread grooves maximize traction and offer excellent water draining on wet roads.




Driving Comfort

Channels built between the tread blocks reduce tyre vibrations for less noise emissions and improve driving comfort.



Snow Performance

The multi-angle tread block sipes improve traction in snow and mud.



Service Life

Extra wide shoulders promote even tread wear and improve high-speed stability.

Rim	Size	LI	SR	PR	XL	Fuel efficiency	Wet Grip	Ext. Rolling Noise	Noise Grade	M+S	3PMSF	EPREL Code
15	195/70R15C	104/102	T	8PR		D	C	71	B	YES	YES	1282029
15	205/65R15C	102/100	T	6PR		D	C	71	B	YES	YES	1282013
15	205/70R15C	106/104	T	8PR		C	C	71	B	YES	YES	1282007
15	215/70R15C	109/107	T	8PR		C	C	71	B	YES	YES	1282045
15	225/70R15C	112/110	T	8PR		C	C	71	B	YES	YES	1282038
16	195/60R16C	99/97	H	6PR		D	C	71	B	YES	YES	1281975
16	195/65R16C	104/102	T	8PR		D	C	71	B	YES	YES	1282047
16	195/75R16C	107/105	T	8PR		C	C	71	B	YES	YES	1282050
16	205/65R16C	107/105	T	8PR		C	C	71	B	YES	YES	1282041
16	205/75R16C	110/108	T	8PR		C	C	71	B	YES	YES	1281989
16	215/65R16C	109/107	T	8PR		C	C	71	B	YES	YES	1282051
16	215/75R16C	113/111	T	8PR		C	C	71	B	YES	YES	1282057
16	225/65R16C	112/110	T	8PR		C	C	71	B	YES	YES	1282022
16	235/65R16C	115/113	T	8PR		C	C	71	B	YES	YES	1282017

Tyre Care & Safety Guide for Passenger & Light Truck Tyres



Important Tips for Optimal Tire Performance :


- 1 Maintain optimum air pressure
- 2 Inspect tread grooves to ensure tires are safe and legal
- 3 Visually check for tire damage

Ensure you check your tires once a month and before long trips to maintain performance and ensure safety.

Why is it important I have the correct tire pressure?

A tire at optimum air pressure should will ensure more safety, provide greater driving performance, improve tire life and reduce fuel consumption.

Tire air pressure decreases naturally (little by little). It is generally accepted that air pressure in tires on a passenger car decreases by 5–10% (10–20kPa) every month.

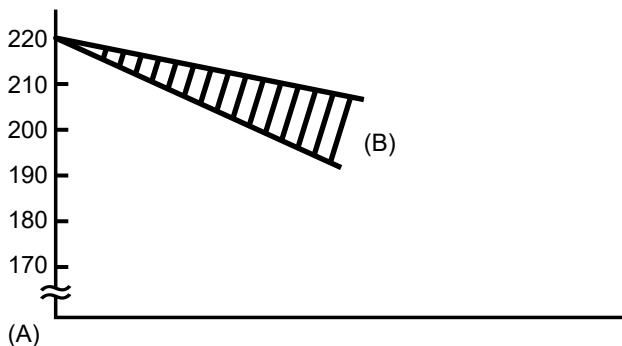

Tire size: 195/65R 15


Starting pressure: 220kPa (100kPa=1.0kgf/cm²)

(A) Air pressure (kPa)

(B) Decreases by 10-20kPa a month

Dangers of Using Worn Tire

Worn tires need a longer stopping distance on wet roads.

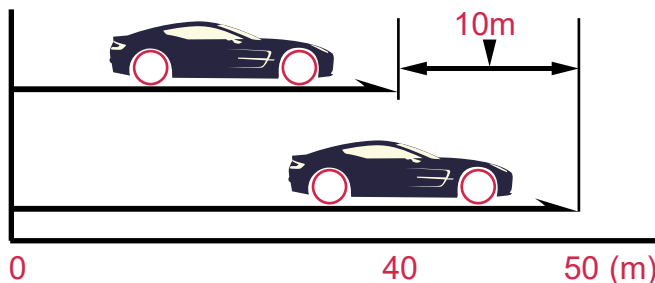

At the same speed (80km/h) and from the same braking point, there is a difference of 10 meters!

(A) New tire

(B) Worn tire (worn out to 1.6mm)

Why is it Important I Check for Tire Wear?

The deeper the groove, which is on the surface of the tire, the more grip a tire will have. As your tread pattern wears over time, the grip will begin to decrease. Never use a tire where even just one tread wear indicator is exposed.

TWI:Tread Wear Indicator(1.6mm)




Indicator Mark:Triangle Symbol “ Δ ”

<Tire Tread Wear Indicator >

What are the advantages of tire rotation?

- 1 Help Prevent Uneven Tread Wear
- 2 Extension of Tire Service Life (money in your wallet)
- 3 Averaging of Tire Fatigue

Note: The front-wheel tires of an FF vehicle wear two or three times faster than the rear-wheel tires because the front-wheel tires function for both driving and steering.

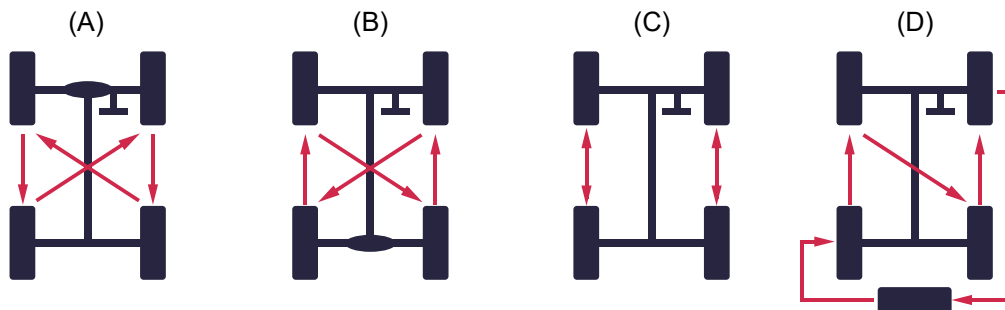

Examples of Tire Rotation

(A) FF Vehicle (B) FR Vehicle (C) Tires with Directional Patterns (D) Spare Tire Included

[illegible]

[illegible]

[illegible]

[illegible]



Dynamo is a value-driven tyre brand, produced by Sailun Tyres, offering a wide range of tyre sizes for passenger cars, crossovers, SUVs and commercial vehicles. Developed and manufactured according to internationally recognised quality and safety standards, Dynamo delivers reliable performance and consistent quality for everyday driving.

In the PCR segment, Dynamo tyres are designed to combine dependable grip, driving comfort and durability in both wet and dry conditions, providing excellent value without compromising on safety or reliability.

In our online shop at www.etd.nl, you can view real-time stock availability and pricing, as well as detailed technical information for each tyre. Request a personal account by contacting sales@etd.nl and gain 24/7 access to our online shop.

DYNAMO